



## **BAVARIA®** Wall Fire Cabinet

Type


### FC-1½ & FC-2½



Gold Series

#### Applications:

Bavaria FC-1½ & FC-2½ wall Fire Cabinet with flat hose is suitable for use in outdoors open areas, industrial and commercial fire protection needs, such as manufacturing, airports, warehouse, auto repair shops, apartment buildings, restaurants, malls, and many others

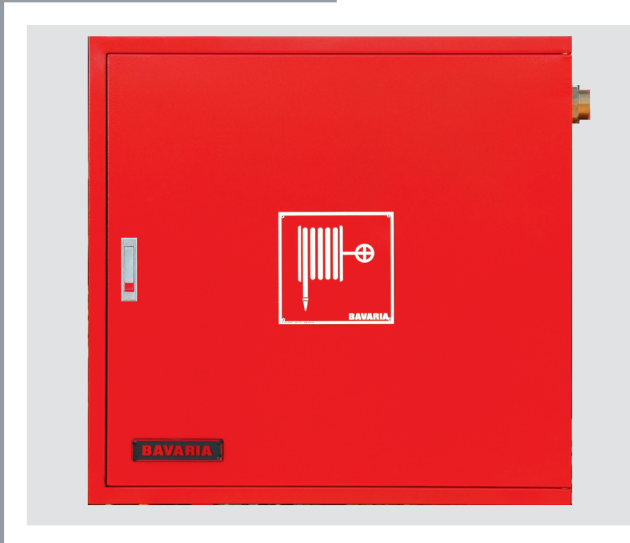

**BAVARIA** EGYPT (S.A.E.)  
Gisir El Suez St. Block 109, Industrial Zone,  
Ismailia Desert Road, Cairo-Egypt  
PO Box: 2016/11111 Cairo-Egypt

Tel. : + 20 (2) 2698 9443 / 5 / 6  
Fax : + 20 (2) 2698 8447  
Website : [www.bavaria-firefighting.com](http://www.bavaria-firefighting.com)  
Email : [international.sales@bavaria.com.eg](mailto:international.sales@bavaria.com.eg)



**BAVARIA** Brandschutz Industrie GmbH & Co. KG  
Regensburger StraBe 16,  
D-93449 Waldmunchen  
Germany

Tel. : + 49 (0) 9972 9401-0  
Fax : + 49 (0) 9972 9401-17  
Website : [www.bavaria-firefighting.de](http://www.bavaria-firefighting.de)  
Email : [info@bavaria-firefighting.de](mailto:info@bavaria-firefighting.de)



## BAVARIA® Wall Fire Cabinet

Type: BAVARIA FC-1½ & FC-2½ - Gold Series ★★★★★

### Features:

- A swing reel design fire cabinet equipped with a flat nylon hose with internal rubber lining
- Standard design for wall mounting and can be manufactured upon request as a recessed type for in-wall fitting type BAVARIA FC-1½-R & FC-2½ -R
- The cabinet door hinges enabling it to swing up to 180°
- Lockable through quick opening lock



Manufactured according to European Standards EN 671-1 & EN 671-2  
 Quality Management System ISO 9001:2000 / ISO 14001 / OHSAS 18001  
 Bavaria Laboratory Accredited According to the ISO/IEC 17025

### Technical Specifications:

Cabinet type	BAVARIA FC-1½	BAVARIA FC-2½
Cabinet Dimensions (wxhxd) cm	84 x 84 x 30	84 x 84 x 30
	(other variations are possible)	
Cabinet Material	Steel according to DIN EN 10130 and ES 1110	
Opening Door	right (standard) or left (option)	
Cabinet Stainless Steel Thickness	1.5 mm	1.5 mm
Hose Reel Swinging Range	0° - 180°	0° - 180°
Hose Diameter	38 mm (1½ inch)	63 mm (2½ inch)
Hose Length	30 m	30 m
Optimum Working Pressure Range	5-12 bar	5-12 bar
Hose Bursting Pressure	Over 48 bar	Over 48 bar
Discharge Fittings	BAVARIA water branchpipe with shut-off nozzle with a 63 mm (2½ inch) Morris coupling	
Paint Finish	Surface treatment and 100% polyester coating	
Accessories	Gate valve with Morris coupling 63 mm (2½ inch)	
Option	Integrated contact free brake glass alarm at extra cost type BAVARIA FC-1½-A & FC-2½ -A	

### Warranty:

Period of Warranty	2 years
Coverage of the Warranty	Against material failure and production defects
Method of Warranty Coverage	Limited to the replacement of the defected part or product after verification that the failure is covered by the scope of the warranty
Warranty Exclusions	Failures due to misuse, mishandling, or inspection or repair by an unauthorized dealer or entity

\* The illustrations may show optional extras only available at extra charge. BAVARIA retains the right to alter specifications and illustrations given herein without prior notice. Specifications will only be considered communicated at placing of order.