



BAVARIA Fire Fighting Solutions

When It Comes To Your Safety Only The BEST Is Good Enough

BAVARIA

BAVARIA® Wheeled Dry Chemical Powder Fire Extinguishers External Pressure Cylinder Operated

Type

TORNADO - 25



APPLICATIONS

BAVARIA TORNADO-25 is a rapid intervention, one man operational unit for effective fire fighting

EFFICIENCY

Supreme extinguishing performance rating due to its multipurpose dry chemical powder "BAVARIA Superlative Powder" and easy to use

RELIABILITY

Robust, functional and permanent reliable technology

UNIVERSALITY

Suitable for solid and glowing incendiary substances, liquid substances or substances becoming liquid and gaseous substances

CREDENTIALS

Unified operating concept for all types of external pressure cylinder operated extinguishers. Manufactured According to European Standard DIN/EN 1866, Approved TÜV, CE, GS, ES 1494.

SPEED


Open turning valve of external pressure cylinder for immediate readiness, and squeeze pistol lever to attack fire from below

EASY TO USE

Supported on a carriage with two rear rollers and a front directional roller for easier maneuvering. Equipped with a reinforced rubber hose for control.

QUALITY

BAVARIA is certified according to Quality, Environment and OHSAS Management Systems ISO 9001, ISO 14001 and BS-OHSAS 18001

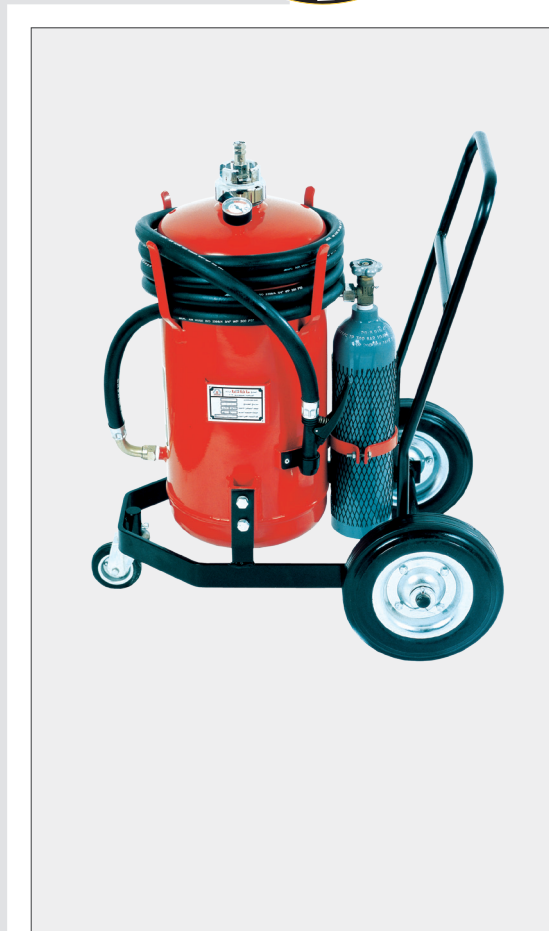

BAVARIA EGYPT (S.A.E.)
Gisir El Suez St. Block 109, Industrial Zone,
Ismailia Desert Road, Cairo-Egypt
P O Box: 2016/11111 Cairo-Egypt

Tel. : +20 (0) 2 2182 0604 / 5 / 6
Fax : +20 (0) 2 2182 0609
Website : www.bavaria-firefighting.com
Email : international.sales@bavaria.com.eg



BAVARIA Brandschutz Industrie GmbH & Co. KG
Regensburger StraBe16,
D-93449 Waldmunchen
Germany

Tel. : +49 (0) 9972 9401-0
Fax : +49 (0) 9972 9401-17
Website : www.bavaria-firefighting.de
Email : info@bavaria-firefighting.de

Germany - Egypt - Lebanon - Sudan
2 plants in Europe and Middle East, 250 dealers worldwide

Together.....
against Fire



BAVARIA® Wheeled Dry Chemical Powder Fire Extinguishers - External Pressure Cylinder Operated

Type: **TORNADO-25- High Hazard ★★★★★**

Features:

- Supreme extinguishing efficiency
- A one man-operational unit
- Allows repeated operation and intermittence at will
- Equipped with a pressure release valve and a pressure gauge
- Equipped with chrome plated brass alloy closure with a mechanical over-pressure safety valve
- Equipped with a 5 m reinforced rubber hose for easy maneuvering
- Equipped with a heat and an electricity-isolated operating pistol
- Propelled with a 3 l external pressure cylinder
- Supported on a carriage with two rear rollers and a front directional roller for easier maneuvering.
- Affords the highest extinguishing rating due to its multipurpose dry chemical powder "BAVARIA Superlative"
- Suitable for electrical equipment up to 1000 V, at minimum distance 1 m



Manufactured According to European Standard DIN/EN 1866

The extinguishing media (dry chemical powder) is certified according to the European Norm EN 615

Certified According to Egyptian Standard ES 1494

TÜV (SÜD Deutschland) Approved Pressure Vessel

Awarded the European (CE) mark

The Company Is Certified according to Quality, Environment and BS-OHSAS Management Systems ISO 9001, ISO 14001

Bavaria Laboratory Accredited According to the ISO/IEC 17025

Technical Specifications:

Capacity	25 kg
Extinguishing Rating	A IB C
Operating Temperature Range*	-20 °C to +60 °C
Testing Pressure	35 bar
Bursting Pressure	Over 70 bar
Closure Material	Chrome plated brass alloy
Discharge Pistol Material	Special engineered polymer
Shell Material	Steel according to EN 10028-3
Extinguishing Agent	MAP-based "BAVARIA Superlative Powder"
Hose	Reinforced rubber hose 5 m length
External Pressure Cylinder	3 l
Propellant Gas	N2
Paint Finish	Surface treatment and 100% polyester coating
Approx Gross Weight	90.0 kg

Manufactured according to European Standard DIN EN 1866

* This product is certified to fully operate at temperatures up to +70 °C according to ES 1494 Standard

Warranty:

Period of Warranty	2 Years
Coverage of the Warranty	Against material failure and production defects
Method of Warranty Coverage	Limited to the replacement of the defected part or product after verification that the failure is covered by the scope of the warranty
Warranty Exclusions	Failures due to misuse, mishandling, or inspection or repair by an unauthorized dealer or entity

* The illustrations may show optional extras only available at extra charge. BAVARIA retains the right to alter specifications and illustrations given herein without prior notice. Specifications will only be considered communicated at placing of order.