




BAVARIA® Dry Chemical Powder Fire Fighting Trailer External Pressure Cylinder Operated

Type

TORNADO - CTR 250

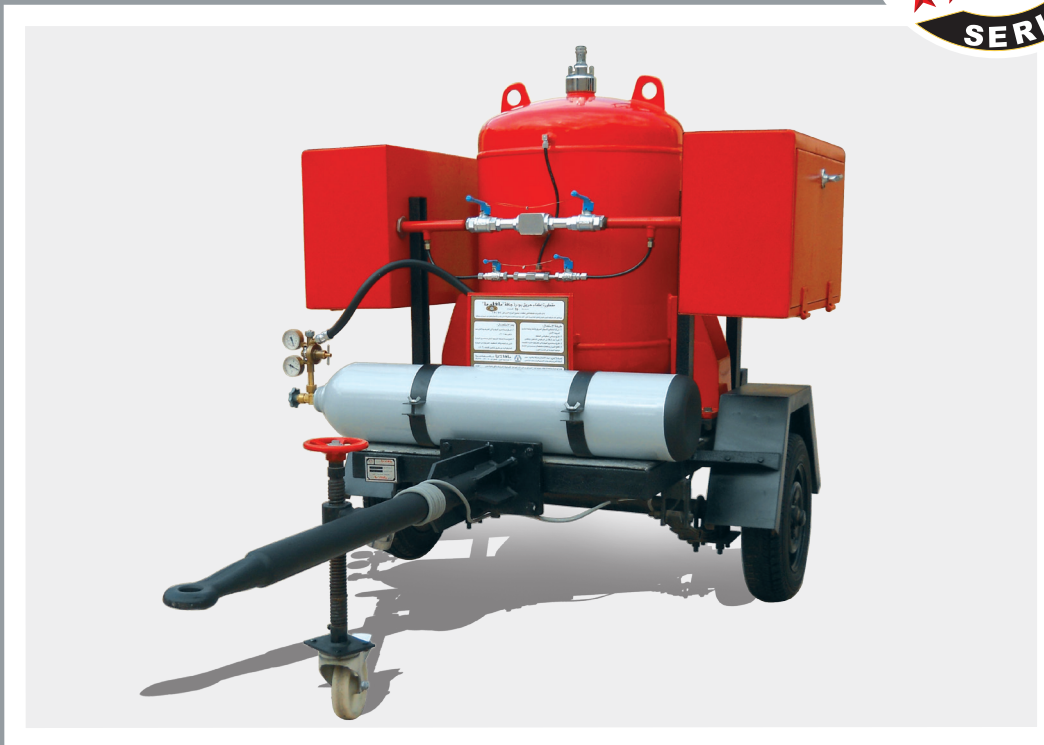

Applications:

The BAVARIA dry chemical powder fire fighting trailer is a rapid intervention one-axle trailer designed for effective fire fighting capabilities in high risk areas such as commercial complexes, industrial plants and large establishments



BAVARIA EGYPT (S.A.E.)
Gisir El Suez St. Block 109, Industrial Zone,
Ismailia Desert Road, Cairo-Egypt
PO Box: 2016/11111 Cairo-Egypt

Tel. : + 20 (2) 2182 0604 / 5 / 6
Fax : + 20 (2) 2182 0609
Website : www.bavaria-firefighting.com
Email : international.sales@bavaria.com.eg



BAVARIA Brandschutz Industrie GmbH & Co. KG
Regensburger Strabe 16,
D-93449 Waldmunchen
Germany

Tel. : + 49 (0) 9972 94 01-0
Fax : + 49 (0) 9972 94 01-17
Website : www.bavaria-firefighting.de
Email : info@bavaria-firefighting.de



BAVARIA® Dry Chemical Powder Fire Fighting Trailer - External Pressure Cylinder Operated

Type: TORNADO-CTR 250 - High Hazard ★★★★★★

Type		TORNADO-CTR 250
Chassis		
Manufactured of	Steel channel sections covered by welded checkered plates	
Axle	One axle of 1 ton capacity	
Draw Bar	Provided with eye hook suitable for towing vehicles	
Drop-leg	Provided at rear	
Down Screw Wheel	Vertically adjustable with a manual brake	
Rear Lights	Equipped	
Wiring	Provided with cable and plug for connection with the electric system of the towing vehicle	
Mudguards and Rear Bumper	Equipped	
Allowed Speed	Up-to 80 km/h on asphalt roads	
Extra Advantage	Lockers	Equipped with two steel side lockers for storage of discharge hoses
Option	Surface Treatment	Galvanized under carriage upon request at extra cost
	Braking System	Upon request at extra cost
Powder Unit		
Capacity	250 kg	
Fire Classes	ABC	
Working temperature range	-20 °C to 70 °C	
Operating Head Material	Chrome plated brass alloy with over pressure safety valve	
Container Material	steel	
Discharge Fittings	2 x 20 m hose with special powder pistol	
Extinguishing Agent	MAP-based	
Pressure Cylinder(s)	1 x 40 l	
Propellant Gas	N ₂	
Cylinder Test Pressure	250 bar	
Paint Finish	Surface treatment and coating	
Container	Testing Pressure	35 bar
	Bursting Pressure	Over 70 bar
	Inspection Top Opening	Equipped
	Bottom Opening	Equipped for maintenance
Pipes System	Valves	Provided with two ball valves for each hose, one for operation and the other for cleaning and pressure release after operation
	Pressure Regulating Unit	The trailer is equipped with two pressure gauges, one for the pressure cylinder(s), and the other for the powder container.
Option	Tarpaulin protective cover for weather protection upon request at extra cost	

Warranty:

Period of Warranty	1 Year
Coverage of the Warranty	Against material failure and production defects
Method of Warranty Coverage	Limited to the replacement of the defected part or product after verification that the failure is covered by the scope of the warranty
Warranty Exclusions	Failures due to misuse, mishandling, or inspection or repair by an unauthorized dealer or entity

* The illustrations may show optional extras only available at extra charge. BAVARIA retains the right to alter specifications and illustrations given herein without prior notice. Specifications will only be considered communicated at placing of order.